

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
 Organization  
 International Bureau



(43) International Publication Date  
 15 January 2004 (15.01.2004)


PCT

(10) International Publication Number  
**WO 2004/005635 A1**

- (51) International Patent Classification?: E04B 1/66, E04C 2/04, 2/26, E04H 7/18
- (21) International Application Number: PCT/NO2003/000239
- (22) International Filing Date: 4 July 2003 (04.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20023302 8 July 2002 (08.07.2002) NO
- (71) Applicant (for all designated States except US): ISOLA AS [NO/NO]; Fabrikk Platon, Lienfossveien 5, N-N-3678 NOTODDEN (NO).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): NILSSKOG, Jan-Erik [NO/NO]; Helfjell, N-N-08664 MOSJÖEN (NO). LÖVMO, Einar [NO/NO]; Klöverveien 30, N-N-7650 VERDAL (NO).
- (74) Agent: OSLO PATENTKONTOR AS; P.O. Box 7007 M, N-N-0306 OSLO (NO).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:  
 — of inventorship (Rule 4.17(iv)) for US only
- Published:  
 — with international search report

[Continued on next page]

(54) Title: DENTICULATION OF CONCRETE JOINTS

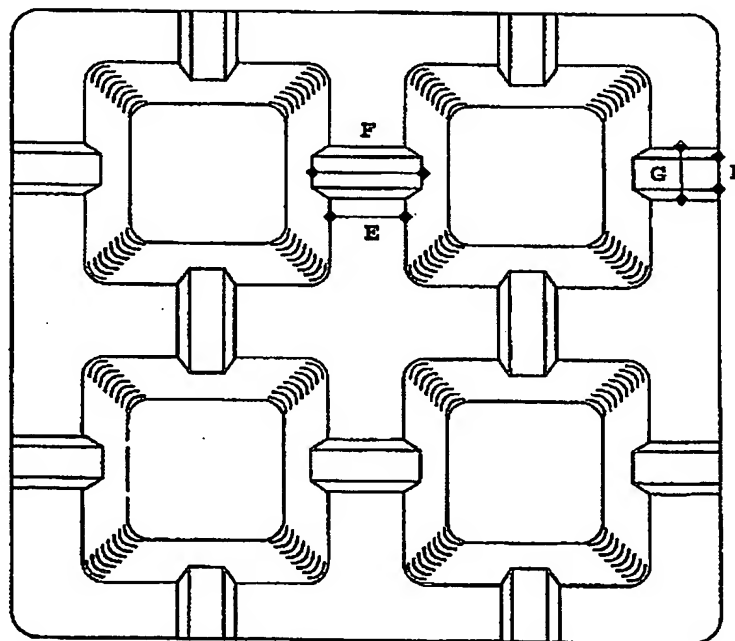

(57) Abstract: The present invention relates to a method for denticulation of a concrete cast joint between a first and a second cast section characterised by that a studded plate is used for the formwork close of the first cast section and that the studded plate is subsequently removed before the second section is cast.

WO 2004/005635 A1